

Data sheet: ASTI5WTL

Release June 2017
Replaces release November 2011

Nominal wattage (W)	15
Electrical characteristics	see IEC 60081 sheet 2120
Light colour	010 UV
Optional shatterproof coated lamp available	Yes
Size A (mm, max.)	26
Size B (mm, max.) - excluding pins	437
Cap	G 13

Rated values

Wattage at 50 Hz (W) *)	15
typical UVA irradiation	3.6 W
typical UVB irradiation	< 0.1 W
Radiation mainten. factor after 2.000 hrs.	85%
Lamp survival factor after 8.000 hrs.	50%

*) without auxiliary equipment such as ballasts

All values for operation at preheat electronic ballast according IEC 60929, 3 hrs. cycle

Note:

SP in coding stands for shatterproof executed lamps	
---	--


Ordering data

Article number	2.04.0810 / 2.04.0890 (SP)
Content of packaging unit	25 pieces
EAN code packaging unit	8719075000335 8717953034083 (SP)

Shipping data

Lamp weight net (g)	75
Lamp weight gross (g)	85
Weight of packaging unit (kg)	2.4
Sizes of packaging unit (cm)	47.5 x 15 x 15
Volume of packaging unit (dm ³)	10.7

Spectrum

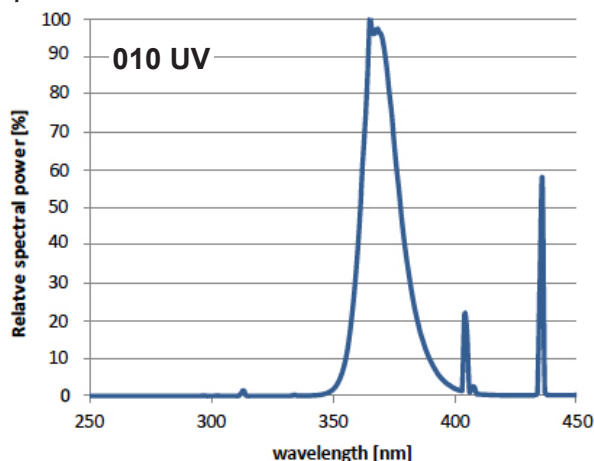

Size

